

# The Beacon™ Series Waist-High Optical Turnstiles BE800-W

Wood Cabinet • Interior Application

The Beacon™ Series is our line of barrier-free pedestrian control devices. Using a non-restrictive method to control traffic flow, these “optical” units are ideally suited for office personnel entrances where the majority of the people enter using an ID card. It allows for rapid pedestrian advancement and barrier free ADA access, while preventing “tail-gating” by those without credentials.

The BE800-Z (featuring rounded ends) has a stainless cabinet with a solid surface top to match any décor. This unit integrates with all standard access control equipment.



BE800-W

**Custom Wood Cabinetry:**  
We can create custom wood cabinetry to match any decor. Select from these or call our team for more ideas.



**Solid Surface Top:**  
These are just a few of the solid surfaces available for your turnstile’s custom top.



## We’re the #1 Choice of Top Architects, Security Pros and Engineers

For two decades, www.TURNSTILES.us has been the globally trusted name in pedestrian control equipment. Made in Ohio and shipped worldwide, we are the first choice of leading architects, facility managers, security consultants and engineers. Whether your project requires high security full-height turnstiles, waist-high units, or matching ADA accessible gates, www.TURNSTILES.us is the secure choice. And, we’re experienced in access control systems, from card readers to biometric scanning, to give you the power to control access.



# The Beacon™ Series Waist-High Optical Turnstiles

## Wood Cabinet • Interior Application

BE800-W

### Applications:

This interior application optical unit features a finely crafted wood cabinet and is ideally suited for office personnel entrances where the majority of people enter using an ID card.

### Product Overview:

Our optical turnstile lanes operate with through beam type sensors to provide accurate monitoring of lane status. To this end, each lane requires a primary cabinet (receivers & logic controller) and secondary cabinet (transmitters). Hybrid cabinets (primary on one side and secondary on the other) are also available to allow multiple lanes per array of cabinets.

Each lane has two main zones comprised of a series of sensors to grant alarm-free passage or detect unauthorized access and tail-gating in either direction of travel.

In addition, crawl-detection sensors exist in the lower section of each cabinet to give additional security. In facilities where excessive low to the ground traffic is frequent, such as gyms with members dragging rolling bags, this feature can be disabled if desired.

### Design & Construction:

#### Materials and Finishes

Cabinets are crafted in your choice of wood species and stain finishes such as

- White Wash, Maple, Birch, Oak, Walnut or Cherry
- Designer tops are available in a wide variety of designer solid surface colors to match your interior design needs
- Dark tinted tempered glass provides a sleek appearance while concealing inner components
- Cabinet dimensions:  
26" long x 38" high x 7" wide

#### Product Features:

- Optical sensors provide for passage for up to 30 people/minute
- Powerful through beam sensors which exceed sensing distance to ensure proper functionality
- LED graphic arrays to indicate direction status
- Optical sensors to prevent unauthorized "crawling" thru lane
- Can be configured for controlled passage in one or both directions, with free or no passage in the other via settings on the logic controller
- Alarm condition provides audible tone as well as solid state output for integration into other systems

### Installation:

- Dual-axis sensor alignment with visible target to ensure a simplified and reliable installation
- Nearly universal integration to any number of access control systems
- Low voltage (24VDC) requirements to secondary cabinet reduce conduit requirements
- Flexibility in passage widths:  
from 22" to 38"


### Options:

- Corian, wooden or other tops outside of our standard selection
- Additional options available on request

### Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

As an added courtesy, ship us your standard sized card readers and we will mount them in the top for you, free of charge. Please speak to a sales associate for details.

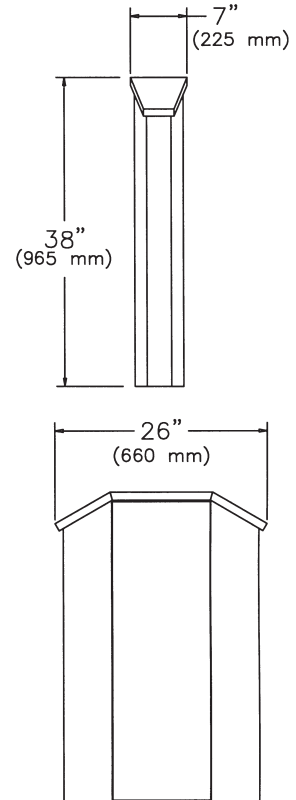

Dimensions are approximate.

### Electrical Specifications:

Input Voltage: 100-240 VAC  
Operating Voltage: 24 VDC  
Operating Current: 15W per lane  
Direction Inputs: Contact Closure (Normally Open, Dry)

### Standards and Codes:

Austenitic stainless steel:  
ASTM A240, A249, A276  
Stainless steel fasteners:  
ASTM A-320  
American Welding Society (AWS)  
Standard D 1.1