

TITAN **THREE QUARTER HEIGHT** **INDUSTRIAL TURNSTILE**



- The TITAN Three Quarter Height is a medium security, aesthetic choice for your entrance
- Designed for high speed, ultra quiet operation
- Exported worldwide

APPLICATIONS

- Suited for applications requiring high volume access and medium levels of security
- Used extensively in applications such as mines, factories, warehouses, universities and stadiums

DESIGNED FOR

- Interior and exterior installations
- Severe operating conditions

AVAILABLE CONFIGURATIONS

- 3 arm (120°) and 4 arm (180°)
- Single and Double

TECHNICAL SPECIFICATIONS


POWER	220 Volt AC (110 Volt AC on request)	
FREQUENCY	50Hz / 60Hz	
POWER CONSUMPTION	50W (single turnstile) / 100W (double turnstile)	
SOLENOID VOLTAGE	24 Volt DC (12 Volt DC on request)	
LOGIC VOLTAGE	24 Volt DC	
DIMENSIONS	Single turnstile:	• 1 335mm wide x 1 400mm long x 1 570mm high
	Double turnstile:	• 1 950mm wide x 1 400mm long x 1 570mm high
ROTOR DIAMETER	1 200mm	
ROTOR ARM CONFIGURATION	<ul style="list-style-type: none"> • 3 arm (120°) • 4 arm (90°) 	
ROTOR ARMS	50mm diameter tube arms	
WEIGHT	Single turnstile (4 arm)	145kg
	Double turnstile (4 arm)	230kg
DESIGN	Modular bolt-together design for ease of transport and installation. Components can pass through a standard door. Can be packed in broken-down form either onto a pallet or into a crate for transport	
SYSTEMS INTEGRATION	<ul style="list-style-type: none"> • Integrates with all access control and time & attendance systems • Unlocking for entry / exit rotation controlled through normally open dry contact • Transaction / Rotation complete output • Integral wireways with draw wires in place – no exposed wires 	

MANUFACTURING OPTIONS

ROTATION OPTIONS	<ul style="list-style-type: none"> • Electrically controlled bi-directional rotation (factory standard) • Mechanically controlled uni-directional rotation by means of key override • Free rotation
LOCKING OPTIONS	<ul style="list-style-type: none"> • Fail-secure auto-lock on power failure (factory standard) • Fail-safe auto-unlock on power failure • Each direction of rotation configurable for either fail-secure or fail-safe operation
FIRE ALARM OPTIONS	<ul style="list-style-type: none"> • Free rotation when triggered indefinitely (logic programmed for either direction of rotation on request)
POWER OPTIONS	<ul style="list-style-type: none"> • Battery backup with two 12 volt 7Ah batteries connected in series <ul style="list-style-type: none"> o Up to 1 000 transactions in fail-secure mode o Up to 60 minutes operation in fail-safe mode
ACCESSORY OPTIONS	<ul style="list-style-type: none"> • Turnstile screen (in matching finish) • Card / Proximity reader mounting brackets • Biometric / Fingerprint reader mounting brackets • Single / Double pushbutton in plastic housing • LED red cross & green arrow indicator light • Multiple coin acceptor for pay-for-entry systems • LCD transaction counter with reset key switch • Random search device
FINISH OPTIONS	<ul style="list-style-type: none"> • Mild steel with UV resistant polyester exterior powder coat finish (charcoal blue hammertone) ■ • Mild steel with hot dip galvanised finish ○ • Mild steel hot dip galvanised with UV resistant polyester exterior powder coat finish (charcoal blue hammertone) ○ ■ • 304 grade brushed stainless steel • 316 grade brushed stainless steel ○ <p>○ suitable for corrosive environments (details available on request) ■ other colours available on request</p>

TITAN RANGE

TITAN SINGLE RANGE			TITAN DOUBLE RANGE		
A	Turnstile width	52.5" (1335mm)	A	Turnstile width	76.75" (1950mm)
B	Walkthrough width	20.6" (525mm)	B	Walkthrough width	20.6" (525mm)
C	Turnstile length	55.1" (1400mm)	C	Turnstile length	55.1" (1400mm)
D	Overall height	61.825" (1570mm)	D	Overall height	61.825" (1570mm)
E	Arm height (1)	50.75" (1290mm)	E	Arm height (1)	50.75" (1290mm)
F	Arm height (2)	N/A	F	Arm height (2)	40.4" (1205mm)

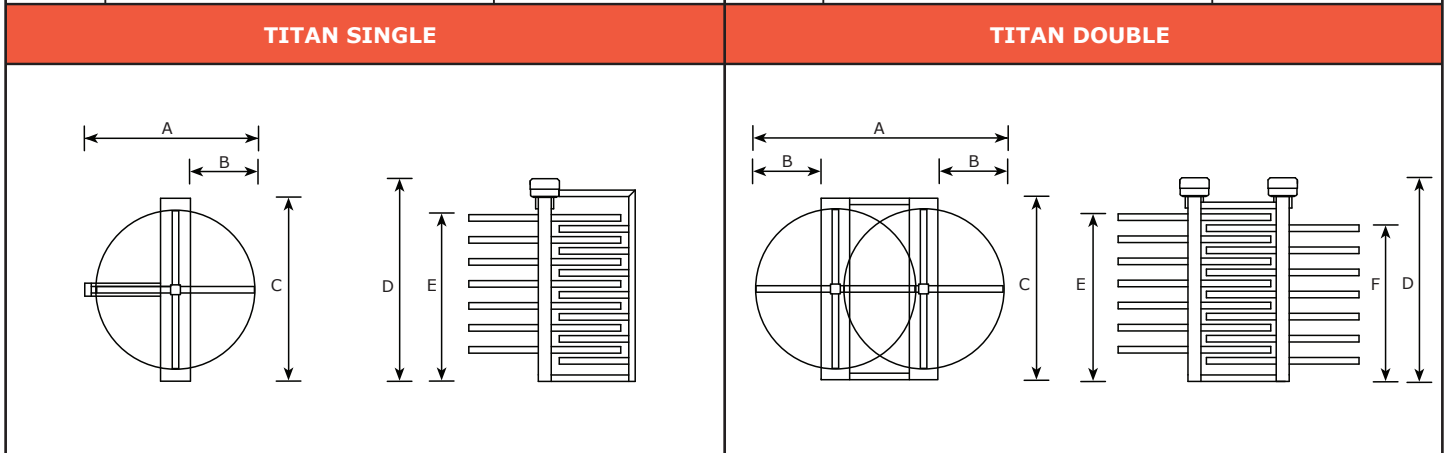

**Note: The turnstile screen shown below is an optional extra.
Due to our policy of continuous improvement, products are subject to change without notice.
Custom designs available on request**

QUALITIES

- 1 Rotalok® rotation locking mechanism and electronic control panel
 - Incorporates:
 - Anti-Trap® safety system
 - Suspended Rotor technology
- 2 Lockable top cover
- 3 Mechanical key override
- 4 Shock absorbing rubber coupling
- 5 50mm diameter tube arms
- 6 Access control reader mounting position
- 7 Rotarun® perpetual base bearing
- 8 Wiring entry point
- 9 Optional turnstile screen

